
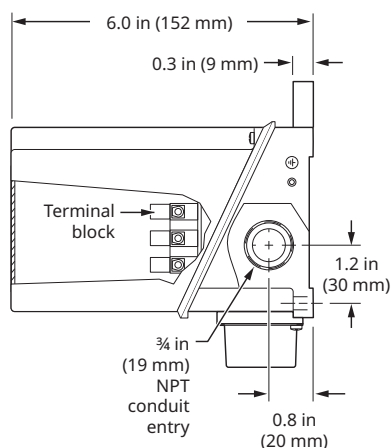
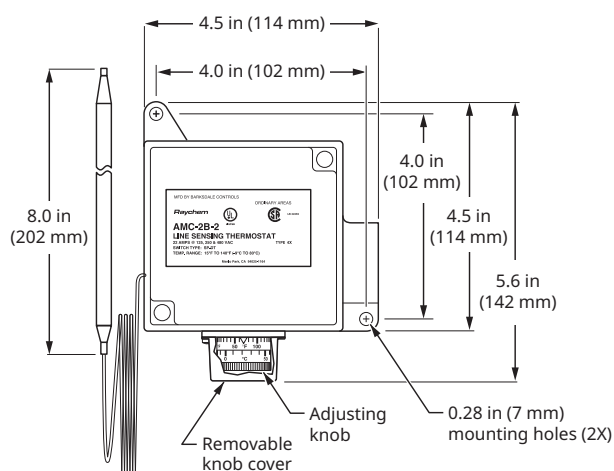


Double-pole line-sensing thermostat for nonhazardous locations

PRODUCT OVERVIEW

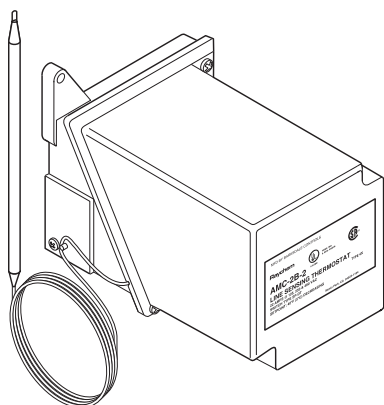

The Raychem AMC-2B-2 line-sensing thermostat is designed to control heat-tracing systems in nonhazardous locations. The thermostat functions as a double-pole single-throw (DPST) switch, opening and closing the electrical connection to both heating-cable bus wires.

The AMC-2B-2 senses pipe or tank wall temperatures and is used to control one heat-tracing circuit directly.

SPECIFICATIONS

Enclosure	TYPE 4X, polyurethane-coated cast-aluminum housing, stainless-steel hardware
Entries	One 3/4 in (19 mm) NPT conduit hub
Set point range	25°F to 325°F (–4°C to 163°C)
Sensor exposure limits	–40°F to 420°F (–40°C to 215°C)
Housing exposure limits	–40°F to 160°F (–40°C to 71°C)
Switch	DPST
Electrical rating	22 A at 208–240 Vac
Relay coil	208–240 Vac, 4 VA
Accuracy	±6°F (±3.3°C)
Deadband	2°F to 12°F (1.1°C to 6.7°C) above actuation temperature
Setpoint repeatability	±3°F (±1.7°C)
Sensor type	Fluid-filled (silicone) bulb and 9 ft (2.7 m) capillary
Sensor material	300 series stainless steel
Connection terminals	Screw terminals, 10–14 AWG (2–5 mm ²)

APPROVALS



North America

Tel +1 800 545 6258
info@chemelex.com

Latin America

Tel +1 713 868 4800
info@chemelex.com

Europe, Middle East, Africa, India

Tel +32 16 213 511
Fax +32 16 213 604
info@chemelex.com

Asia Pacific

Tel +86 21 2412 1688
infoAPAC@chemelex.com



Raychem Tracer Pyrotenax Nuheat