


Multi-protocol device gateway ProtoNode-RER-1.5K and ProtoNode-RER-10K

PRODUCT OVERVIEW

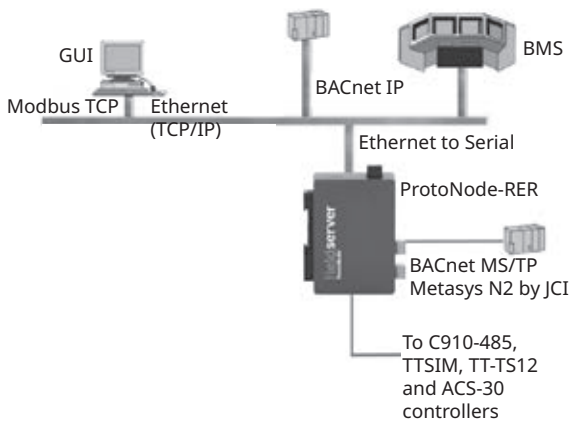

The Raychem ProtoNode is an external, high performance multi-protocol gateway for customers needing protocol translation between Building Management Systems (BMS) using BACnet® or Metasys® N2 and the Raychem C910-485, ACS-30, TT-TS12 or TTSIM controllers.

The Raychem ProtoNode-RER-1.5K and ProtoNode-RER-10K come pre-programmed with the C910-485, ACS-30, TT-TS12 and TTSIM Modbus® profiles for simple integration into a BMS. One ProtoNode can connect to: one ACS-30 system or up to six C910-485 controllers or up to 6 TT-TS12s or up to 255 TT-SIM modules.

ProtoNode-RER-1.5K: Provides support for Modbus RTU to BACnet MS/TP, BACnet IP (BTL Certified), and Metasys N2 protocol translation for C910-485, TTSIM and smaller scale ACS-30 systems (up to 5 PCM panels). The gateway features an ARM9 processor for fast performance and includes two RS-485 and one Ethernet ports.

ProtoNode-RER-10K: Provides support for Modbus RTU to BACnet MS/TP, BACnet IP (BTL Certified), and Metasys N2 protocol translation for larger ACS-30 systems (up to 34 PCM panels). The gateway features an ARM9 processor for fast performance and includes two RS-485 and one Ethernet ports.

Features and benefits:

- The most flexible and versatile multiprotocol device server on the market
- BACnet International's BTL Certification makes the ProtoNode-RER the most reliable gateway on the market
- Multi-client and multi-server support ensures interoperability between any Industrial and or Building Automation protocols
- Flash upgradable

For additional information, contact your Chemelex representative or call (800) 545-6258.

APPROVALS



BACnet Testing Labs (BTL) B-ASC on ProtoNode-RER

SPECIFICATIONS

ProtoNode-RER-1.5K & ProtoNode-RER-10K	
Electrical connections	<ul style="list-style-type: none"> • One 3-pin Phoenix connector, one RS-485 +/- ground port, power +/- frame ground port • Two 3-pin RS-485 Phoenix connector, Two RS-485 +/- ground port • One Ethernet-10/100 Ethernet port
Power requirements	12–24 Vdc or 24 Vac
Max. power	3W @12 Vdc
Supported field protocols	<ul style="list-style-type: none"> • BACnet IP (Ethernet) • BACnet MS/TP (RS-485) • Metasys N2 open (RS-485)
Operating temperature	–20 to 70°C (–4 to 158°F)
Relative humidity	10–95% RH, noncondensing
Enclosure dimensions (HxWxD)	4 x 1.1 x 2.7 in (10.16 x 2.8 x 6.8 cm)

NUMBER OF PROTONODE/CONTROLLER CONNECTIONS

Description	ProtoNode-RER-1.5K	ProtoNode-RER-10K
C910-485	6	N/A
TT-TS12	6	N/A
TTSIM modules	100	N/A
ACS-PCM2-5 Panels	5	34

ORDERING DETAILS

Description	Catalog number	Part number	Weight (lbs/kg)
ProtoNode-RER-1.5K: BACnet MSTP/IP and Metasys N2 protocol gateway	ProtoNode-RER-1.5K	2000004256	0.4/0.2
ProtoNode-RER-10K: BACnet MSTP/IP and Metasys N2 protocol gateway	ProtoNode-RER-10K	2000004257	0.3/0.14

North America

Tel +1 800 545 6258
info@chemelex.com

Latin America

Tel +1 713 868 4800
info@chemelex.com

Europe, Middle East, Africa, India

Tel +32 16 213 511
Fax +32 16 213 604
info@chemelex.com

Asia Pacific

Tel +86 21 2412 1688
infoAPAC@chemelex.com



Raychem Tracer Pyrotenax Nuheat