


RTD Temperature Sensor For Temperature Measurement up to 900°F (482°C)

PRODUCT OVERVIEW

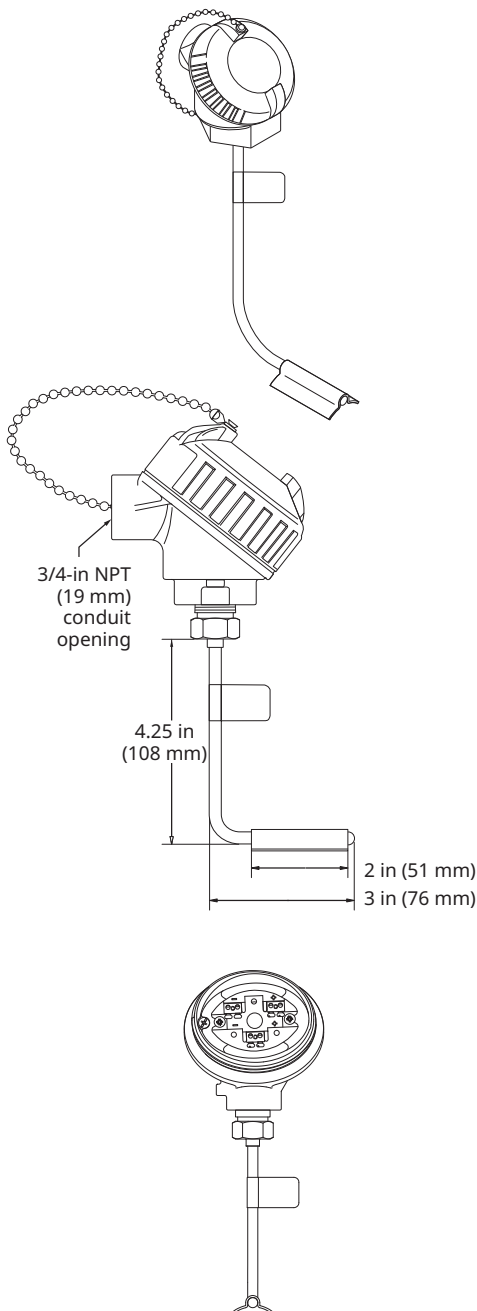

The Raychem RTD4AL-SS is a three-wire platinum RTD (resistance-temperature detector) typically used with monitoring and control systems that require accurate temperature control. The RTD4AL-SS kit can be used with a wide variety of Raychem monitoring and control systems.

SPECIFICATIONS

Sensor housing	316 stainless steel
Sensor sheath	316 stainless steel
Range	-100°F to 900°F (-73°C to 482°C) maximum
Accuracy	±1°F (0.5°C) at 32°F (0°C)
Resistance	100 ohms at 0°C α =0.00385 ohms/ohm/°C
Connection	3/4-in (19 mm) NPT conduit hub

Note: The length of RTD extension wires is determined by the wire gauge used. To reduce the likelihood that electrical noise will affect temperature measurement, keep RTD extension wires as short as possible. Use shielded instrument cable such as Raychem MONI-RTD-WIRE (22 AWG, PVC insulation, -30°F to 140°F, -20°C to 60°C) or Belden 83553 (22 AWG, FEP insulation, -95°F to 395°F, -70°C to 200°C).

ADDITIONAL MATERIALS REQUIRED


Pipe strap, conduit, 16–22 AWG shielded instrument cable

KIT CONTENTS

One RTD temperature sensor

APPROVALS

The RTD4AL-SS is CSA certified to U.S. and Canadian standards.



North America

Tel +1 800 545 6258
info@chemelex.com

Latin America

Tel +1 713 868 4800
info@chemelex.com

Europe, Middle East, Africa, India

Tel +32 16 213 511
Fax +32 16 213 604
info@chemelex.com

Asia Pacific

Tel +86 21 2412 1688
infoAPAC@chemelex.com



Raychem Tracer Pyrotenax Nuheat