


Remote monitoring module for Digital Inputs

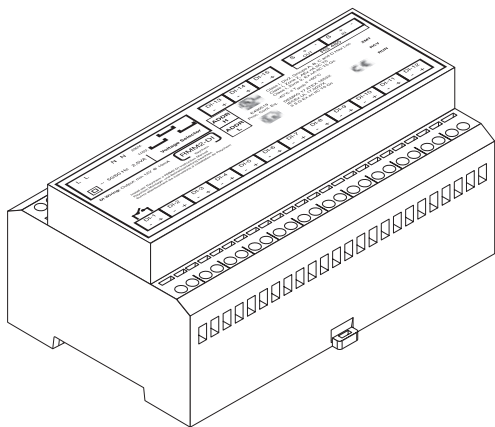

The Remote Monitoring Module for Digital Inputs (Raychem RMM2-DI) provides the capability for the Raychem NGC controller family to read the status of devices remotely and can link them back to the electrical heat-tracing circuits. The RMM2-DI has in total 15 digital inputs. Multiple RMM2-DI units can communicate with a single User Interface providing centralized monitoring capabilities.

CONTROL AND MONITORING

A Raychem NGC network controls up to 260 heat-tracing circuits per system based on ambient or pipe temperatures. The RMM2-DI module can be used to collect circuit breaker status, contactor status or other digital information in the field. This information will be communicated back to a central location via one communication cable, reducing installation and wiring cost.

CIRCUIT BREAKER TRIP ALARMS

When monitoring the circuit breaker status with the RMM2-DI module, the information can be linked in the NGC control system to the associated electrical heat-tracing circuits. An alarm will be generated when a circuit breaker trips. As a result the User Interface will show in detail which circuit breaker tripped and the associated electrical heat-tracing circuit(s) effected. The alarms may be reported remotely through an alarm relay in the User Interface, via Raychem Supervisor and upstream to a Process Control system via a Modbus communication link.

CONFIGURATIONS

The RMM2-DI is an electronic device that clips to a DIN 35 rail. For other installation options, contact Chemelex.

GENERAL

Area of use	Hazardous area when mounted in Ex-d enclosure RMM-DI panel mount, safe area
-------------	--

APPROVALS

RMM2-DI module



E490519
Proc. Cont Eq

Class I, Div2, Groups A, B, C and D Haz Loc
Class I, Zone 2, AEx nA IIC T5
Class I, Zone 2, Ex nA IIC T5 Gc
DEMKO 17 ATEX 1853X
IECEX UL 17.0027 II 3 G Ex ec IIC T5 Gc



(In progress)

Ambient operating temperature range

-40 °F to +140 °F (-40 °C to +60 °C)

Ambient storage temperature range

-60 °F to +140 °F (-51 °C to +60 °C)


Relative humidity

max. 95%, noncondensing

Supply voltage

(nominal) 115/230 Vac +10% -10%
50/60 Hz (jumper selectable)

DIMENSIONS (IN INCHES)

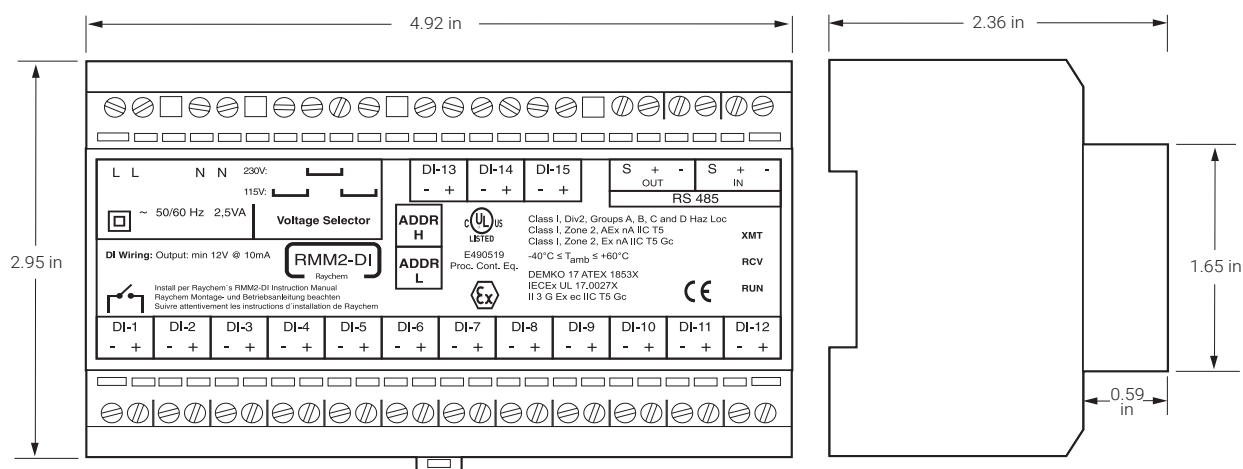

DIGITAL INPUT

Type	2 wire digital input
Supplied power	Minimum power per DI connection supplied by RMM2-DI module 12V 10mA (Sink/source)
Number of signals	15 Digital inputs

COMMUNICATION TO RAYCHEM NGC CONTROL SYSTEM

Type	RS-485
Protocol	Modbus RTU
Cable type	Shielded twisted pair
Length cable	1200 m max.
Address switch	Selectable on RMM2-DI, address range: 1-255

CONNECTION TERMINALS

Supply (in-out)	4 terminals for cables 0.2 mm ² to 4 mm ² (24 AWG to 12 AWG)
RS-485 connection	2 x 3 terminals for cables 0.2 mm ² to 2.5 mm ² (24 AWG to 12 AWG)
DI connections	15 x 2 terminals for cables 0.2 mm ² to 2.5 mm ² (24 AWG to 12 AWG)

ELECTROMAGNETIC COMPATIBILITY

EN 60730-1: 2011

EN 61000-6-3:2007+A1:2011

EN 61000-3-2:2006 +A1:2009+A2:2009

EN 61000-3-3:2008

EN 61000-6-2:2005

ORDERING DETAILS

Additional Details	Part Description	Product Number	EAN Number
RMM2-DI, no enclosure	RMM2-DI	1244-018083	5414506018479

North America

Tel +1 800 545 6258
info@chemelex.com

Latin America

Tel +1 713 868 4800
info@chemelex.com

Europe, Middle East, Africa, India

Tel +32 16 213 511
Fax +32 16 213 604
info@chemelex.com

Asia Pacific

Tel +86 21 2412 1688
infoAPAC@chemelex.com

chemelex
excellence is everything

Raychem Tracer Pyrotenax Nuheat