
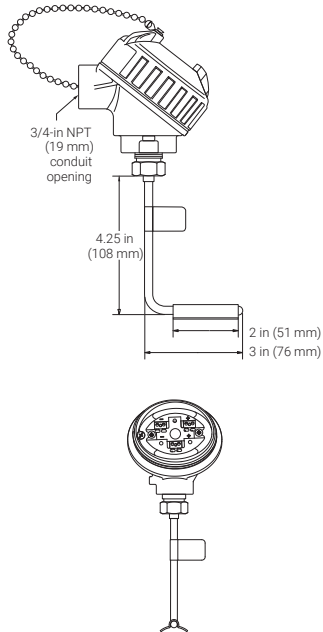


# *Raychem*

## RTD4AL-SS

RTD Temperature Sensor for Temperature Measurement up to 900°F  
(482°C) Installation Instructions

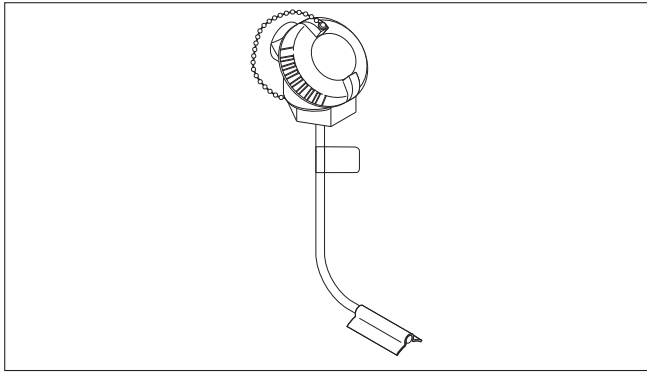

## DESCRIPTION

The Raychem RTD4AL-SS is a three-wire platinum RTD (resistance temperature detector) typically used with monitoring and control systems that require accurate temperature control. The RTD4AL-SS kit can be used with a wide variety of Raychem monitoring and control systems.

These instructions detail the installation of the RTD4AL-SS in conjunction with existing Raychem component kits.

## TOOLS REQUIRED

- 3.5 mm flat-blade screwdriver

## ADDITIONAL MATERIALS REQUIRED

- Pipe straps
- Conduit with 16–22 AWG shielded instrument cable or equivalent armored cable

## APPROVALS

The RTD4AL-SS is CSA Certified for use in North America by the manufacturer for use in Division 2 hazardous locations as follows:



Class I, Division 2, Groups A, B, C, D  
Class II, Division 2, Groups F, G

## KIT CONTENTS

### Qty Description

1	RTD Temperature Sensor
---	------------------------

## SPECIFICATIONS

Sensor housing	316 stainless steel
Sensor sheath	316 stainless steel
Range	–100°F to 900°F (–73°C to 482°C) max
Accuracy	±1°F (0.5°C) at 32°F (0°C)
Resistance	100 ohms at 0°C α =0.00385 ohms/ohm/°C
Connection	3/4 in. NPT conduit hub

## WARNING:

This component is an electrical device. It must be installed correctly to ensure proper operation and to prevent shock or fire. Read these important warnings and carefully follow all the installation

instructions. Component approvals and performance are based on the use of specified parts only. Do not use substitute parts or vinyl electrical tape to make connections.

## WIRING INFORMATION


The length of RTD extension wires is determined by the wire gauge used.

To reduce the likelihood that electrical noise will affect temperature measurement, keep RTD extension wires as short as possible.

Use shielded instrument cable such as Raychem MONI-RTD-WIRE (22AWG, PVC insulation, –30°F to 140°F, –20°C to 60°C) or Belden 83553 (22 AWG, FEP insulation, –95°F to 395°F, –70°C to 200°C).

AWG	Maximum RTD extension wire length	
	Feet	(meters)
16	4500	(1400)
18	2800	(880)
20	1800	(550)
22	1100	(340)

## RTD DIRECT CONNECTION

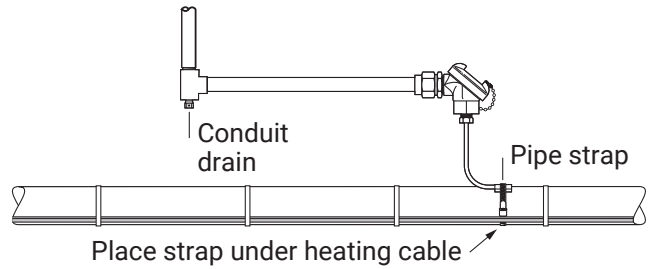


## INSTALLATION WITH HEATING CABLE ELECTRICAL WIRING GUIDELINES:

### Electrical Wiring Notes:

Most electrical codes (such as NEC Article 725) permit Class 1 circuits to occupy the same cable, enclosure, or raceway without regard to whether the individual circuits are alternating current or direct current, providing all conductors are insulated for the maximum voltage of any conductors in the cable, enclosure or raceway.

### Additional Materials Required

- JBS-100-A or other power connection kit
- Pipe straps

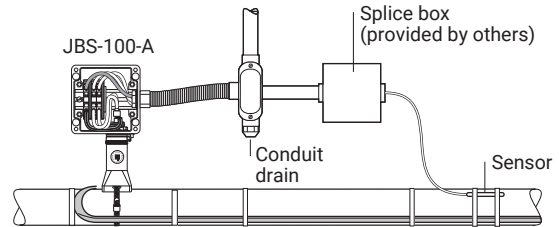



## RTD4AL WIRING

Connect the wires as shown.

**1 Note:** Ground RTD extension wire shield at one end only, preferably at Raychem electronics end.

**2 Note:** RTD housing must be properly grounded using the screw provided.

### Electrical schematic of RTD

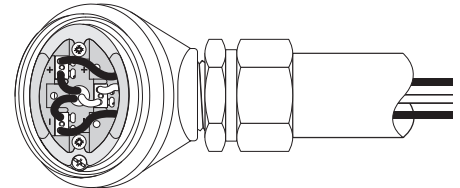

**North America**

Tel +1 800 545 6258  
info@chemelex.com

**Latin America**

Tel +1 713 868 4800  
info@chemelex.com

**Europe, Middle East, Africa, India**

Tel +32 16 213 511  
Fax +32 16 213 604  
info@chemelex.com

**Asia Pacific**

Tel +86 21 2412 1688  
infoAPAC@chemelex.com

---

**chemelex**  
*excellence is everything*

**Raychem**

**Tracer**

**Pyrotenax**

**Nuheat**