
















Components and accessories

SYSTEM COMPONENTS

Junction boxes – power and splice connection kits

Product	Order Reference	Description
Fibreglass CID2 enclosure 	MIJB-864-A	<p>Junction box with pre-drilled earth plate for use with MI heating units.</p> <p>Typical uses - Power, splice and end box for 3 phase systems</p> <p>Hazardous locations: CID2 Groups B, C and D. Maximum operating voltage 600 Vac. Maximum 35 A per terminal, rated 18 AWG to 6 AWG, NEMA 4X.</p> <p>Entries: Up to 8 x ½" and 3 x ¾". Power cable gland and hubs not included.</p> <p>Two mounting brackets (MBRP-B) and two pipe straps must be ordered separately for installation.</p> <p>Enclosure dimensions: 8" x 6" x 4" (200 x 150 x 100 mm)</p>
Fibreglass CID2 enclosure 	MIJB-1086-A	<p>Junction box with pre-drilled earth plate for use with MI heating units.</p> <p>Accommodates up to 3 power cables.</p> <p>Typical uses - Power, splice and end box for 3 phase systems</p> <p>Hazardous locations - CID2 Groups B, C and D. Maximum operating voltage 600 Vac. Maximum 35 A per terminal, rated 18 AWG to 6 AWG, NEMA 4X.</p> <p>Entries: Up to 11 x ½" and 8 x ¾". Power cable gland and hubs not included.</p> <p>Two mounting brackets (MBRP-B) and two pipe straps must be ordered separately for installation. Order a separate MIJB-LPWR-KIT for #2 or #4 AWG power cable to downsize to #6 AWG (35 A).</p> <p>Enclosure dimensions: 10" x 8" x 6" (250 x 200 x 150 mm)</p>
Fibreglass CID2 enclosure 	MIJB-1086-B	<p>Junction box with pre-drilled earth plate for use with MI heating units.</p> <p>Accommodates up to 7 outgoing heating cables and one incoming power cable. It can also be used as a marshalling box – one incoming power cable and 5 outgoing power cables.</p> <p>Typical uses - Power or marshalling, splice and end box for 3 phase systems.</p> <p>Hazardous locations: CID2 Groups B, C and D. Maximum operating voltage 600 Vac. Maximum 35 A per terminal, rated 18 AWG to 6 AWG, NEMA 4X.</p> <p>Entries: Up to 11 x ½" and 8 x ¾". Power cable gland and hubs not included.</p> <p>Two mounting brackets (MBRP-B) and two pipe straps must be ordered separately for installation. Order a separate MIJB-LPWR-KIT for #2 or #4 AWG power cable to downsize to #6 AWG (35 A).</p> <p>Enclosure dimensions: 10" x 8" x 6" (250 x 200 x 150 mm)</p>
Enclosure mounting bracket 	MBRP-B	<p>Enclosure mounting bracket for MIJB series fiberglass enclosures. Mounting bracket enables enclosure installation and connection prior to application of insulation and cladding. Stainless steel pipe support bracket for MIJB-864-A, MIJB-1086-A and MIJB-1086-B fiberglass enclosures. Two brackets are required to support each enclosure. Each bracket requires one pipe strap.</p>

Product	Order Reference	Description
Terminal kit for MIJB-1086 model 	MIJB-LPWR-KIT	Terminal kit to facilitate downsizing of large power cables. Large power wire kit to downsize #2 or #4 power cable to #6 AWG (max 35 amps for enclosure terminal blocks). Use with MIJB-1086-A and MIJB-1086-B enclosures as required.
Cast CID1 enclosure 	XMI-JB	Aluminum enclosure for CID1 areas. Typical uses: MI heating units power or splice connection box, RTD connection box Hazardous locations - CID1 Groups B, C and D, Maximum operating voltage 600 Vac, Includes 4 pole terminal block (CSA-600 Vac, 65 A, 18-6 AWG / UL-300 Vac, 65 A, 18-6 AWG), NEMA 4X. Entries: 5 x 3/4" and includes 3 x 3/4" plugs, two reducer bushings (3/4" x 1/2") and two mounting feet with space to tap hole for bonding wire. Power cable gland should be purchased separately. Additional terminal strips or reducer bushings may also be purchased separately for additional RTD connection. (4POLETSTRIP and PTRDBH3412) Enclosure dimensions: 4 1/2" x 3 1/2" (114 x 89 mm).
Terminal strip 	4POLETSTRIP	Terminal strip for enclosure, 4 pole terminal strip (CSA-600 Vac, 65 A, 18-6 AWG /UL-300 Vac, 65 A, 18-6 AWG) for use with XMI-JB enclosure. May be used for additional RTD connections.
Reducer bushing 	PTRDBH3412	Reducer bushing for enclosure, Zinc plated steel reducer bushing for use with XMI-JB enclosure. Reduces 3/4" NPT tapered hole to 1/2" NPT. Body length 2 3/2" (18 mm), Class I, Div. 1 & 2, Groups A, B, C, D. Class I, Zone 1, Groups IIC, IIB, IIA. Class II, Div. 1 & 2, Groups E, F, G.
CID1 enclosure with mounting feet 	RMI-JB3	Copper-free aluminum alloy box with three entries for use with MI heating cables. Typical use: power or splice connection box Includes terminal block (500 Vac, 50 A, 2 x 6 AWG) and three 3/4" x 1/2" reducers and two 3/4" NPT plugs. FM and CSA approved for: Class I, Div. 1 & 2, Groups B, C, D; Class II, Div. 1 & 2, Groups E, F, G; and Class III. Enclosure dimensions: 6.1" x 5.2" x 3.9" (156 mm x 133 mm x 98 mm).
CID1 enclosure with bracket 	PT-JB	A smaller ferro-alloy junction box with three entries for use with MI heating cables. Typical use: power or splice connection box Three 3/4" NPT entries. Provided with one plug and two 3/4" x 1/2" reducers. Includes 4 pole terminal block (CSA-600 Vac, 65 A, 18-6 AWG / UL-300 Vac, 65 A, 18-6 AWG) and stainless steel support bracket (U-clamp). UL and CSA approved for: Class I, Div. 1 & 2, Groups A, B, C, D; Class II, Div. 1 & 2, Groups E, F, G. Enclosure dimensions: 5.5" x 4.75" x 3" (140 mm x 121 mm x 76 mm).

Product	Order Reference	Description
<p>Cast CID2 enclosure</p>  <p>D1297TERM4</p>	D1297TERM4	<p>A large cast aluminum junction box (NEMA 3R) for installation in nonhazardous and CID2 areas.</p> <p>Typical use: power or splice connection box</p> <p>Three ½" NPT entries on bottom, provided with plugs. Includes 4 pole terminal block (CSA-600 Vac, 65 A, 18–6 AWG / UL-300 Vac, 65 A, 18–6 AWG). External mounting feet. CSA approved for Class I, Div 2, Groups A, B, C, and D.</p> <p>Enclosure dimensions: 6" x 6" x 4" (152 mm x 152 mm x 101 mm).</p>
<p>Support bracket for D1297TERM4</p> 	D1297BRACK	<p>Optional stainless steel mounting bracket for junction box type D1297TERM4. To be strapped on metal cladding of pipe insulation using metal banding or pipe straps (based on outer dimension of insulation).</p>
<p>Nonhazardous enclosure and digital electronic controller</p>		<p>Electronic temperature controllers that provide accurate control of a heating circuit using a RTD sensor.</p> <p>Adjustable set points between 32°F to 425°F (0°C to 218°C), power input of 120 Vac to 277 Vac, and current switching up to 30 A. c-CSA-us (certified to U.S. and Canadian Standards) for use in nonhazardous locations.</p> <p>Requires MI grounding kit.</p>
	JBS-100-ECP-A	<p>The JBS-100-ECP-A is pipe mounted and serves as a power connection kit for both self-regulating and mineral insulated heating cables.</p>
	JBS-100-ECW-A	<p>The JBS-100-ECW-A is wall mounted and may be used with all types of heating cables. It can also be used as a power connection kit with MI cables.</p>
<p>MI cable grounding kit</p> 	MI-GROUND-KIT	<p>Required grounding kit for use with JBS-100-ECP-A and JBS-100-ECW-A. Allows for a direct connection to a MI heating cable, eliminating the need for a separate junction box.</p>

ACCESSORIES

Attachment materials










Product	Order Reference	Description																								
Pipe straps for MI heating cable 	PB (see Table 1)	Stainless-steel straps for holding MI heating cables onto pipe. Pliers are the only tool required to pull the pipe strap tight. Allow one pipe strap per foot of pipe (3.3 pipe straps per meter of pipe). Table 1 Available Pipe Straps																								
		<table border="1"> <thead> <tr> <th>Order Reference</th> <th>Pipe Diameter</th> <th>Package Quantity</th> </tr> </thead> <tbody> <tr> <td>PB 125</td> <td>To 1¼"</td> <td>50 pc</td> </tr> <tr> <td>PB 300</td> <td>1½" to 3"</td> <td>35 pc</td> </tr> <tr> <td>PB 600</td> <td>3½" to 6"</td> <td>25 pc</td> </tr> <tr> <td>PB 1000</td> <td>6" to 10"</td> <td>1 pc</td> </tr> <tr> <td>PB 1200</td> <td>To 12"</td> <td>1 pc</td> </tr> <tr> <td>PB 2400</td> <td>To 24"</td> <td>1 pc</td> </tr> <tr> <td>PB 3600</td> <td>To 36"</td> <td>1 pc</td> </tr> </tbody> </table>	Order Reference	Pipe Diameter	Package Quantity	PB 125	To 1¼"	50 pc	PB 300	1½" to 3"	35 pc	PB 600	3½" to 6"	25 pc	PB 1000	6" to 10"	1 pc	PB 1200	To 12"	1 pc	PB 2400	To 24"	1 pc	PB 3600	To 36"	1 pc
Order Reference	Pipe Diameter	Package Quantity																								
PB 125	To 1¼"	50 pc																								
PB 300	1½" to 3"	35 pc																								
PB 600	3½" to 6"	25 pc																								
PB 1000	6" to 10"	1 pc																								
PB 1200	To 12"	1 pc																								
PB 2400	To 24"	1 pc																								
PB 3600	To 36"	1 pc																								
Tie wire 	051CUPRON	16 AWG tie wire for fastening Alloy 825 MI heating cables on pipes. Do not use with copper-sheathed MI heating cables; use PB pipe straps. Particularly good for irregular shaped objects like valves and pumps. Order quantity as required (in ft) as per Table 2.																								
RMI-TW 	559600-000	Tie wire for fastening steel heating cables on pipes. Especially suitable for irregular shaped objects such as pumps, valves, flanges. Supplied in 50 m reels.																								

Table 2 Allowance for Banding / Tie Wire on Pipes


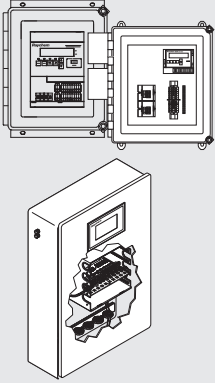
Pipe Size (Inches)	1	1.5	2	4	6	8	10	12	14	16	18	20	24	30	36	48
Required length (ft) per ft of pipe	0.8	1.1	1.2	1.6	2.1	2.8	3.5	4.2	4.6	5.2	5.9	6.5	7.9	9.8	11.8	15.7
Required length (m) per m of pipe	0.8	1.1	1.2	1.6	2.1	2.8	3.5	4.2	4.6	5.2	5.9	6.5	7.9	9.8	11.8	15.7

Stainless-steel prepunched strapping band 	107826-000	HARD-SPACER-SS-25MM-25M stainless steel prepunched strapping to hold MI heating cable in place. Supplied in 82 ft (25.0 m) rolls. Use on large pipes to simplify installation of multiple heating cables. For quantities, see Table 2 (installation every 1 ft = 0.328 m).
HWA-METAL-MESH-SS-50MM-10M 	1244-005772	Stainless steel mesh to hold heating cables on valves, pumps or other odd shaped surfaces. This mesh provides optimum contact and heat transfer between heating cables and heated equipment and can be used for exposure temperatures up to 400°C (752°F). 10 m per roll. 50 mm width. Weight: 0.36 kg.

Product	Order Reference	Description
Banding 	BAND100FT	Stainless steel banding used to strap MI cables to pipes Ideal for large OD pipes 100 ft roll x ½" wide x 0.020" thick (30 m x 12.5 mm wide x 0.5 mm thick) Use with BANDCLIP100 banding clips ordered separately
Clips 	BANDCLIP100	Stainless steel clips used with stainless steel banding 100 clips per package Use with BAND100FT ordered separately
Tensioner 	T34P	Ratchet-type tensioning tool tightens stainless-steel banding used to support MI Cables.
Crimper 	S12P	Crimping tool used to crimp clip onto stainless-steel banding.

ADDITIONAL ACCESSORIES AND COMPONENTS

Attachment materials

Product	Order Reference	Description
Electric traced label 	ETL - English ETL - French	Attach the label to the outside of the thermal insulation weather barrier to indicate presence of electrical heat tracing. Use one label for every 10 feet (3 m) of pipe, alternating on either side of the pipe. Also install at equipment requiring periodic maintenance (control valves, pumps, instruments, etc.).
Temperature controls 		For a complete selection of control and monitoring products, including line-sensing thermostats, see Control and Monitoring.

North America

Tel +1 800 545 6258
 info@chemelex.com

Latin America

Tel +1 713 868 4800
 info@chemelex.com

Europe, Middle East, Africa, India

Tel +32 16 213 511
 Fax +32 16 213 604
 info@chemelex.com

Asia Pacific

Tel +86 21 2412 1688
 infoAPAC@chemelex.com